


PRESSURE SWITCHES

POW PAC

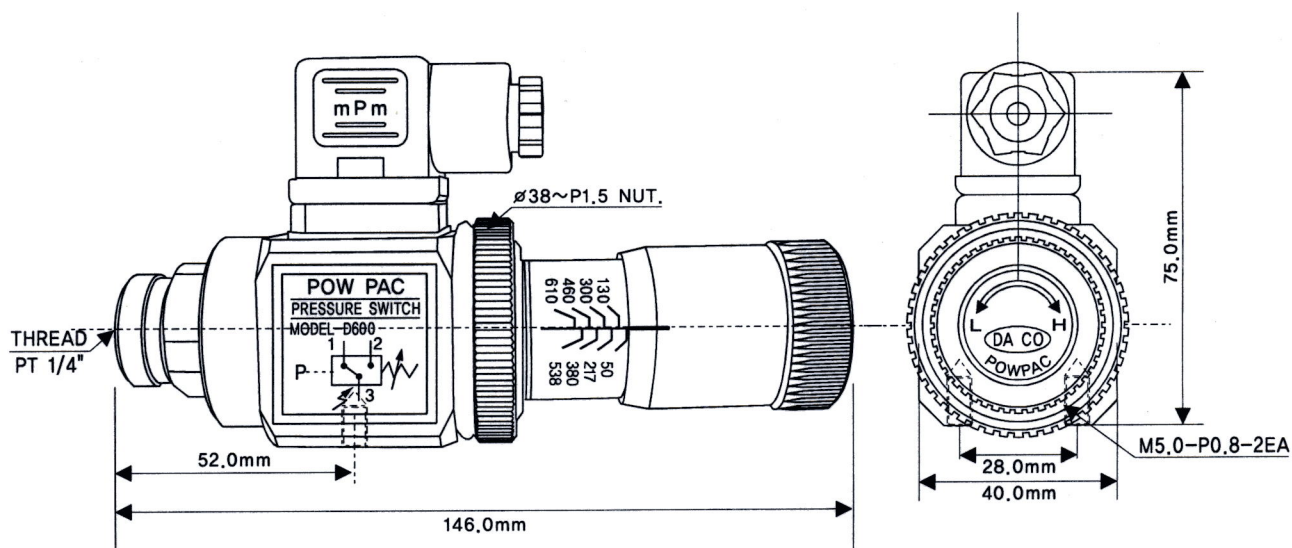

SPECIFICATIONS

(황색)

(은색)

(청색)

(적색)

Item \ Type	D35	D120	D320	D600
Set Pressure Range	1~35 kg/cm ²	5~120 kg/cm ²	10~320 kg/cm ²	30~600 kg/cm ²
Pressure Proof Test Pressure	250 kg/cm ²		800 kg/cm ²	
Piping Size	PT 1/4"			
Weight	550g			
Hydraulic Fluids	Clean petroleum base hydraulic oil equivalent to ISO VG 32-46#			
Room Temperature	-20~+70℃ on condition that there is no bedewing at a Low-Temperature range			
Mechanical Lifetime	More 1,000,000 cycles			
Electrical Lifetime	More 200,000 cycles			
Maximum Frequency Operation	60 cycles/min			
Rated Current	250VAC,3A 125VAC,5A 125VDC,0.4A 30VDC,3A			

FUNCTIONAL SYMBOL

